




Larsen Dairies

Partners in Excellence

Larsen Dairies Backing Gate

Herd control systems

Built for the rigors of time

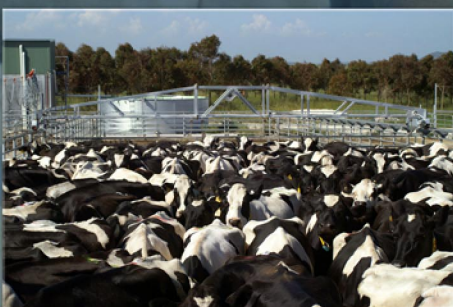


Larsen Dairies Backing Gates

Larsen Dairies Backing Gates incorporate the very best in manufacturing technology and design to create a product for commercial herd applications.

Larsen Dairies Backing Gates are built not only for strength, durability and ease of maintenance but most importantly for efficiency of operation.




Larsen Dairies Backing Gates are a fully electric operated herd control system. The design provides operators full flexibility over their herd management practices in providing the ability to split large herds. The gate moves back and forth along the yard herding cows toward the dairy saving both time and manpower.

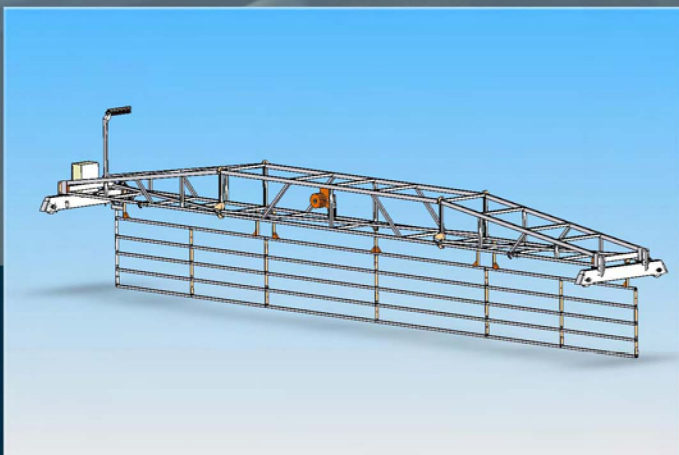

Ease of Installation:

Larsen Dairies Backing Gates are supplied in a modular form that simply bolts together allowing for very fast onsite installation.

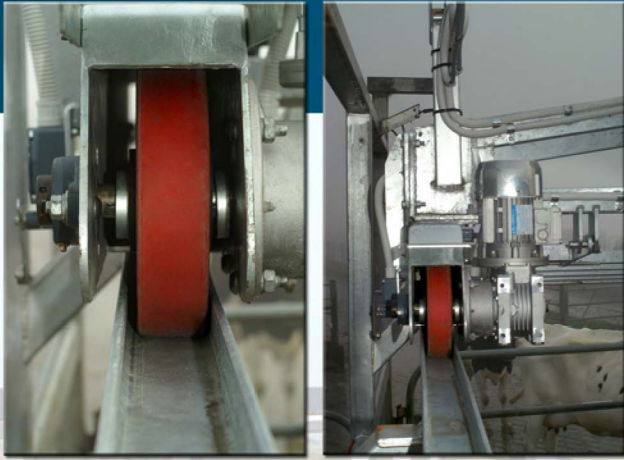

Wheels:

Larsen Dairies Backing Gates work on four polyurethane wheels run parallel along the length of the yard. The wheels are quiet during operation which is advantageous as cattle will not be startled while the Gate is in motion.

Motors:

Two electric motors operate the forward and reverse movement with an additional electric motor mounted in the center of the frame to control the lifting function of the gate.

Laser Components:


Wherever possible, Larsen Dairies Backing Gates use laser cut components to ensure standardization and repeatable quality for an uncomplicated installation.

Electric Controls:

Larsen Dairies Backing Gates are supplied with a primary and secondary control unit. Simple commands allow for ease of operation with 4 main control buttons; Forward, Reverse, Gate Up and Gate Down. The primary unit is typically mounted on the gate and the secondary unit is located at cups on position within the dairy shed. This allows for access without having to leave the working area.

Fully Galvanized:

The entire structure is hot dipped galvanized for resilience in an exposed environment.

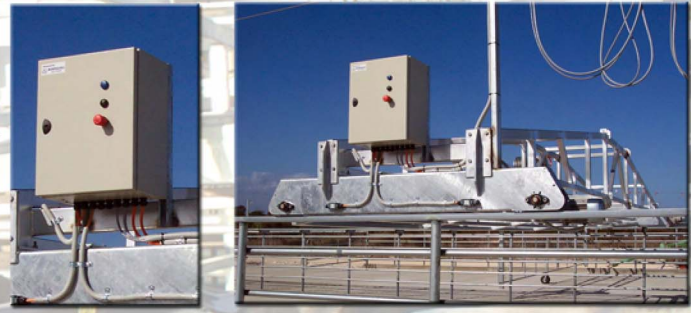

Size:


Larsen Dairies Backing Gates are designed to span from 8 meters to 18 meters wide. Any width can be accommodated but standard sizes are 8, 10, 12, 16 and 18 meters. When lifted, the gate gives an approximate height clearance of 1.8 meters accommodating even the tallest cow.



Larsen Dairies

Partners in Excellence

PRODUCTS GLOBALLY EXPORTED

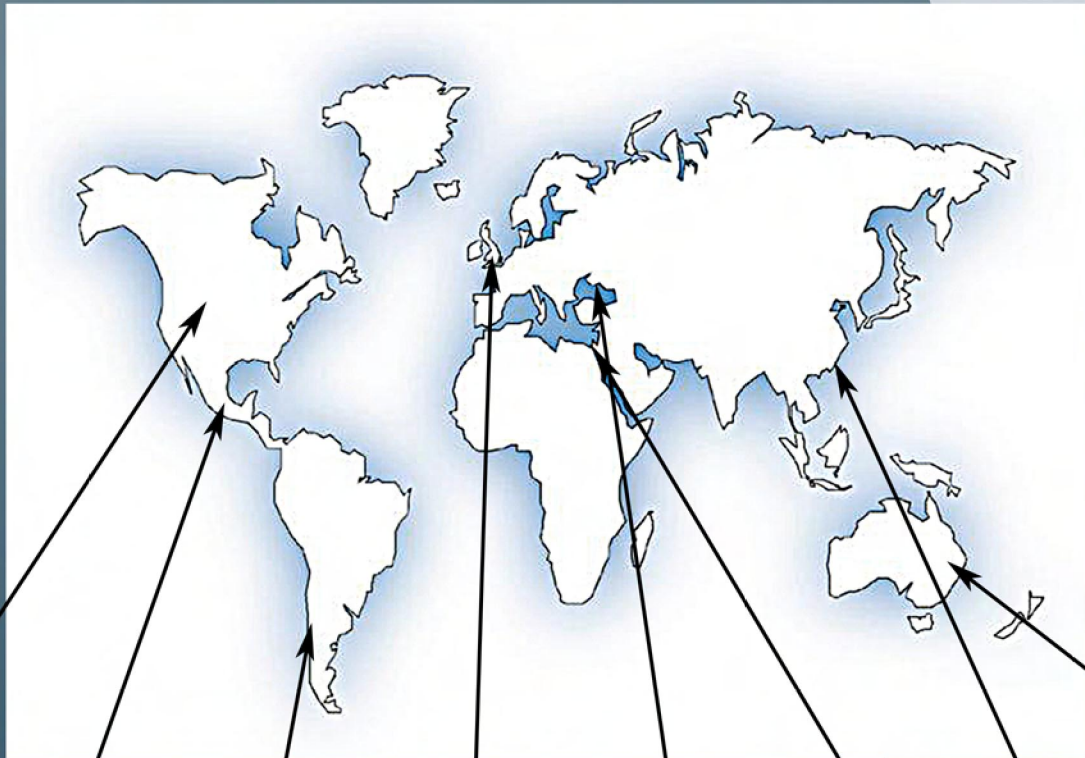

your dealer:



Greg: +61 04 37791215

Matt: +61 04 00434607

Dave: +61 04 36202 289

Address: 23 Muller Street

Wodonga VIC

Australia 3690

Email: gdkinross@gmail.com