



# Larsen Dairies

*Partners in Excellence*

## Larsen Dairies Rotary Platform External Rotary Built for the rigors of time



# Rotary Platform Information

Larsen Dairies Rotary Platforms incorporate the very best in manufacturing technology and design to create a product for commercial herd applications.

Larsen Dairies Rotary Platforms are built not only for strength, durability and ease of maintenance but most importantly for efficiency of operation.




## Cabinets:

Cabinets feature a tapered profile that provides hip clearance that makes it very ergonomic regardless of the size of the cow. The bail structures are hot dipped galvanized with the option of stainless steel. Location points for milk lines and equipment can be customized to suit any milk system. Where ever possible, Larsen Rotary Platforms use laser cut components to ensure standardization and repeatable quality for an uncomplicated installation.

## Drives:

Both Electric and Hydraulic drive options are available.

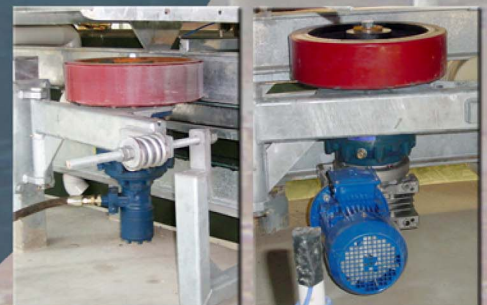

Radial dimensions/building sizes:


ITEM	36 UNIT	40 UNIT	50 UNIT	60 UNIT	70 UNIT	80 UNIT
RADIUS	4869.5	6492.5	8115.5	9739	11362	12973.5
DIAMETER	9739	12985	16231	19478	22724	25947.0
<b>BUILDING SIZE</b>						
WIDTH	16000	18000	22000	24000	28000	30000
LENGTH	22000	24000	30000	32000	36000	36000



**Retention bars:**  
intergrated retention bars can be fitted to stop cows that have not finished milking from exiting the platform.

**Feed Troughs:**  
Optional feed troughs are adjustable to suit any cow size. Feed troughs provide the farmer with the ability to feed their herd while milking.

**Equipment:**  
All automation, sensors and electronics are installed behind a stainless steel front cover that requires no fasteners for quick accessibility. This allows all equipment to be kept clean and protected from the harsh milking environment.

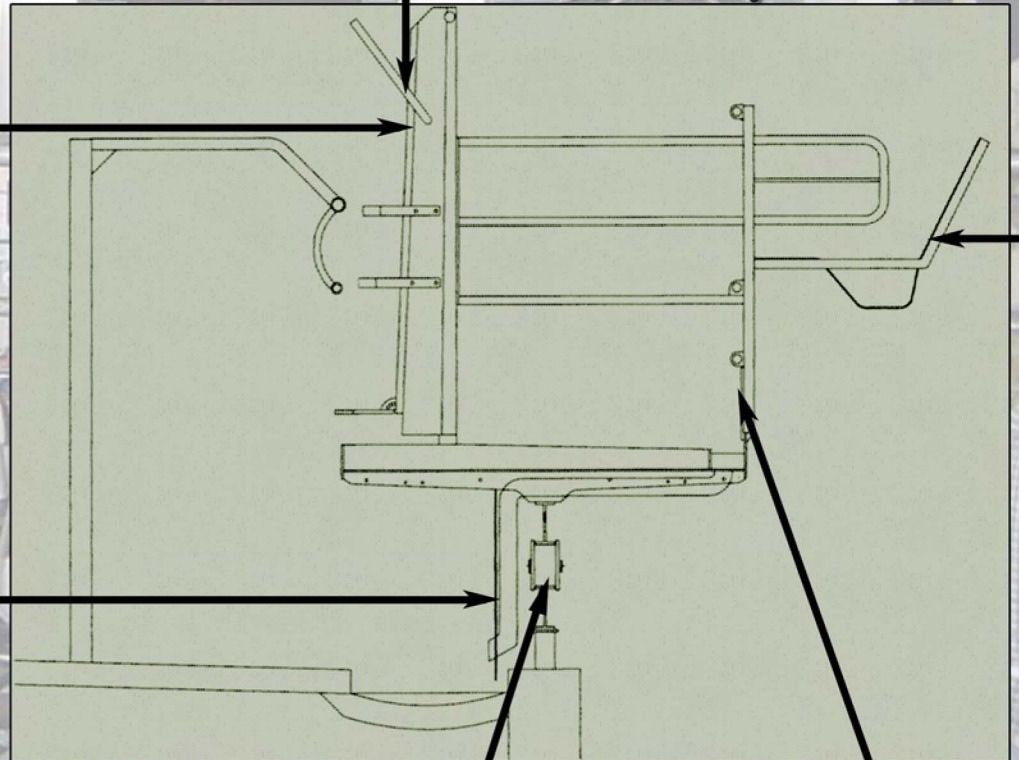

**Drain:**  
A unique platform drain is located every 3rd bail to run the waste water to either internal or external ring drains to suit the farmers needs.

**Rollers:**  
The platform rotates on Nylon Rollers each possessing a high molecular density and low coefficient of friction to combine for a 6000kg+ load rating. Each roller is spaced one per bail and has a unique self aligning feature.


**Platform Skirts:**  
Larsen Rotary Platforms include safety skirts as standard with a plastic knee skirt option to minimize any waste water from fouling the inner platform area.



# Larsen Dairies

*Partners in Excellence*

## PRODUCTS GLOBALLY EXPORTED

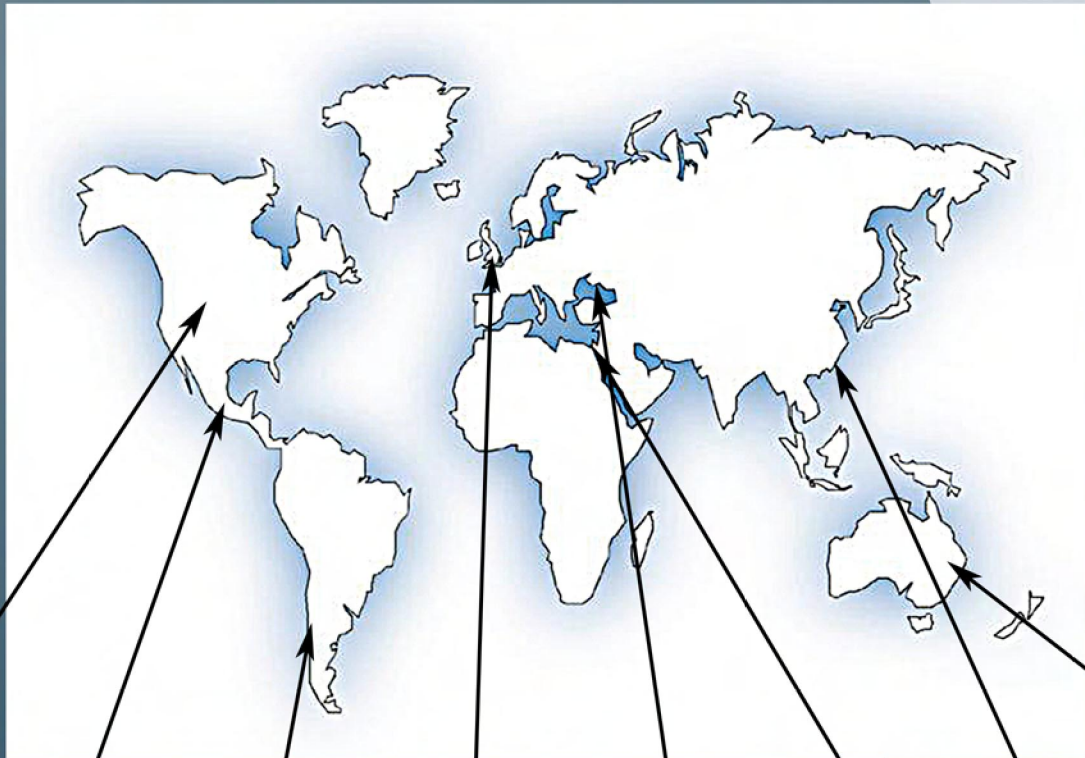

your dealer:



Greg: +61 04 37791215

Matt: +61 04 00434607

Dave: +61 04 36202 289

Address: 23 Muller Street

Wodonga VIC

Australia 3690

Email: [gdkinross@gmail.com](mailto:gdkinross@gmail.com)